



PRT1-2/1

Precision's durable all stainless steel GN2/1 roll-in cabinets have been designed to provide commercial caterers with reliable, energy and cost efficient refrigerated storage solutions. Proudly designed in the UK, these robust cabinets are capable of meeting the highest demands of commercial kitchens all around the world.

Available in one and two door variants, Precision's roll-in cabinets are made using a cam-lock modular panel system to make transportation and installation a breeze.



PRT2-2/1

Key Features:

Stainless Steel Interior & Exterior

Designed To Operate In 43°C Ambient

GN 2/1 Trolley System

R290 Refrigerant

Zero ODP Injected Polyurethane Insulation

+1 / +4°C Refrigerator Temperature Range

Electronic Controller With Easy Read LCD Screen

Hot Gas Defrost

Rifle Bore Coated Evaporators

Integrated Flush Door Handle

Hi / Lo Audio Visual Temperature Alarms

Condensing Unit Safety System To Protect Compressor From Blocked Condensers

Waste Heat Recovery Condensate Vaporiser System


Included Bumper Strip

Onsite Assembly


Options:

Floored and Floorless options


Pass Through (Increases Depth to 1088mm)

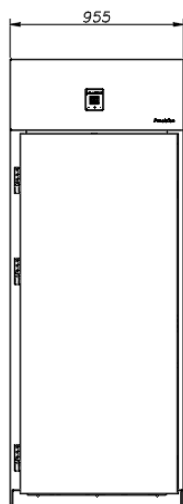

PRT1-2/1

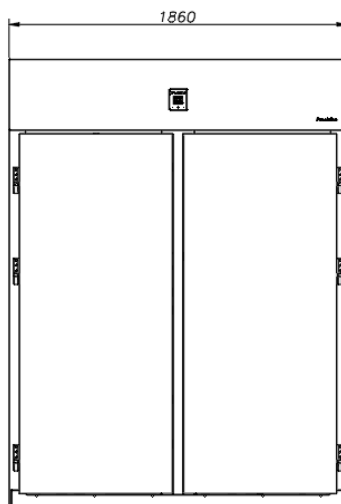

PRT2-2/1

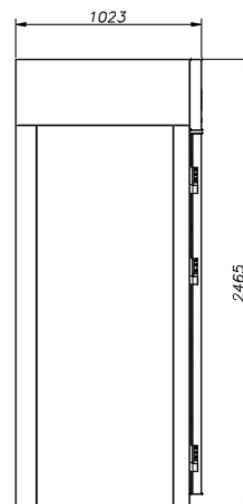

Model	HPRT1-2/1	LPRT1-2/1	HPRT2-2/1	LPRT2-2/1
Type	Refrigerator	Freezer	Refrigerator	Freezer
Material	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext
Trolley Size	GN2/1	GN2/1	GN2/1	GN2/1
Number of Trolley	1	1	2	2
Temperature Range	+1/ +4°C	-18 / -22°C	+1/ +4°C	-18 / -22°C
Exterior WxDxH (mm)	955x1023x2465	955x1023x2465	1860x1023x2465	1860x1023x2465
Net Usable Volume (litres)	1028	1028	2228	2228
Weight (KG)	216	220	294	300
Refrigerant / GWP	R290 / 3	R290 / 3	R290 / 3	R290 / 3
Refrigeration Watts (+45°C Condensing)	642	800	1227	1100
Evaporating Temp	-10°C	-30°C	-10°C	-30°C
Heat Rejection Watts*	850	1140	1620	1480
Power	220 / 50 / 1	220 / 50 / 1	220 / 50 / 1	220 / 50 / 1
Running Amps	3.8	4	5	5.7
Total Electrical Load - kW	0.84	0.88	1.10	1.25
Energy Consumption / 24hrs - kWh**	N/A	N/A	N/A	N/A
Energy Consumption / Year (AEC) - kWh**	N/A	N/A	N/A	N/A
Energy Efficiency Class**	N/A	N/A	N/A	N/A

* Heat Rejection is taken at the listed evaporating and condensing condition. Watts is calculated by taking the total power of the cabinet.

** Tested to BS EN ISO 22041

We are constantly innovating and improving our products. Please scan QR code for the most up-to-date version of this spec sheet: